


SOIL


# Euro102

tiller


**MECHANICAL GEARBOX**  
gear drive



**TILLER SPEED**



39 rpm  172 rpm  
130 rpm  
39 rpm

**PROFESSIONAL**



## Euro102

<b>ENGINE</b>	Honda GX160 163 cc 3.6 kW Petrol	Euro 212.ohv 212 cc 4.0 kW Petrol	Euro 178F 296 cc 4.4 kW Diesel
<b>STARTER</b>	recoil	recoil	recoil or electric
<b>HANDLEBAR</b>	vertically and laterally adjustable		
<b>TRANSMISSION</b>	made in Italy gearbox with gears in oil bath 3 milling speeds, reverse two power take-offs (PTO), one standard and one synchronised with the gearbox		
<b>ROTAVATOR</b>	6 stars Ø34 cm of which 2 removable - 24 bolted knives work width 95-65 cm tillers rotation 172/130/39 rpm		
<b>OTHER</b>	plant saver discs, adjustable spur		
<b>TRANSPORT WHEELS</b>	optional, tractor profile tyres 5.00-10" or rubber to be assembled on plant saver discs		
<b>NET WEIGHT</b>	86 kg	95 kg	104 kg
<b>DIMENSIONS</b>	108X145X92(h) cm		


 <b>GR.WEIGHT</b>	94-112 KG
 <b>PACKAGING</b>	95X50,5X90(H) CM
<b>PALLET</b>	110X120X195(H) CM / Q*4PCS



**ROTAVATOR**  
bolted knives  
Ø34 cm 95 cm  
can be reduced to 65 cm  
with discs



**HANDLEBAR**  
vertically and laterally  
adjustable

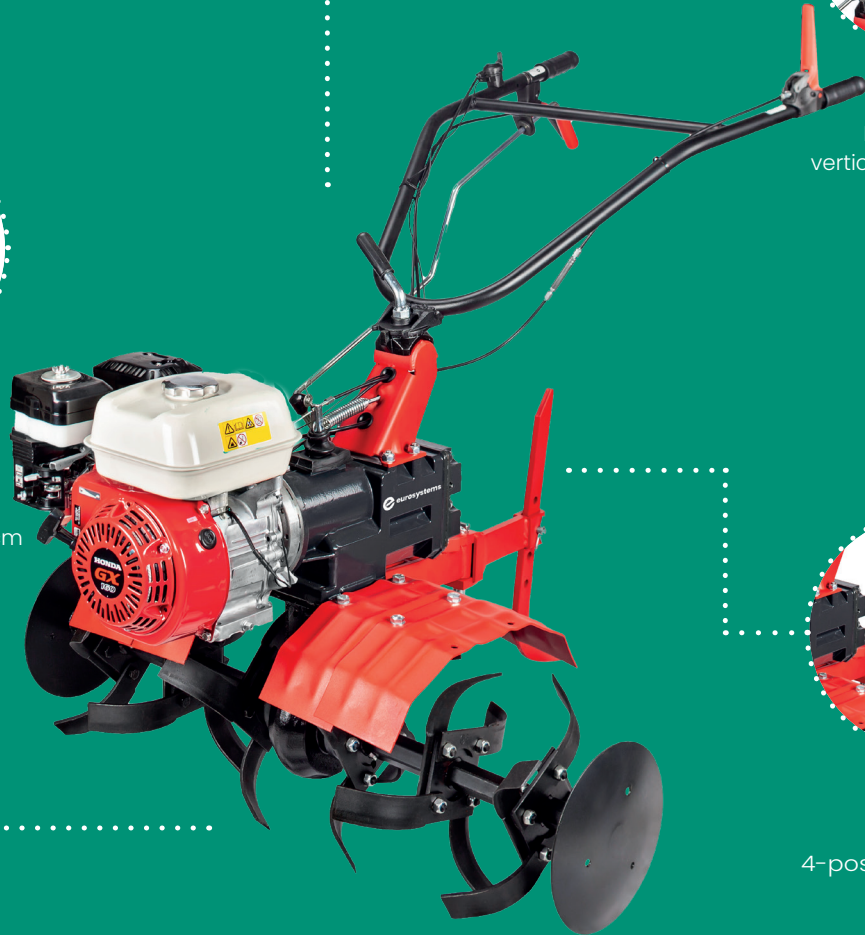

**SPUR**  
4-position adjustable



**TRACTOR WHEELS**  
pneumatic 5.00-10"



**CUTTER EXTENSION**  
work width 112 cm



**TRANSPORT WHEELS**  
to be assembled on discs



**TAMPING MACHINE**  
with adjustable wings



**AS STANDARD**



**ACCESSORY**



**PATENTED**