

Euro5 evo

tiller



	Euro5 evo 2.1			Euro5 evo LABOUR
ENGINE	GP160 C 163 cc 1 3.6 kW	63 cc 20 3.6 kW 4.0	es 19 50 8 cc 0 kW trol	B&S CR950 208 cc 4.0 kW Petrol
STARTER	recoil			recoil
HANDLEBAR	vertically and laterally adjustable			vertically and laterally adjustable
TRANSMISSION	gears and chain in oil bath and belt 2 milling gears, reverse			gears and chain in oil bath and belts 2 milling gears, reverse
ROTAVATOR	6 stars Ø32 cm of which 2 removable - 24 bolted knives work width 75-50 cm tillers rotation 125/97 rpm			6 stars Ø32 cm of which 2 removable 24 bolted knives work width 75-50 cm tillers rotation 136/27 rpm
OTHER	plant saver discs, adjustable spur, quick release front transport wheel			plant saver discs, adjustable spur, quick-release front transport wheel
TRANSPORT WHEELS	quick release front transport wheel			quick release front transport wheel
NET WEIGHT	58 kg	58 kg	59 kg	59 kg
DIMENSIONS	75x140x132(h) cm			75x140x132(h) cm
GR.WEIGHT PACKAGING PALLET	63-64 KG 79X52X71(H) CM 80X120X225(H) CM / Q* 6PCS			64 KG 79X52X71(H) CM 80X120X225(H) CM / Q* 6PCS



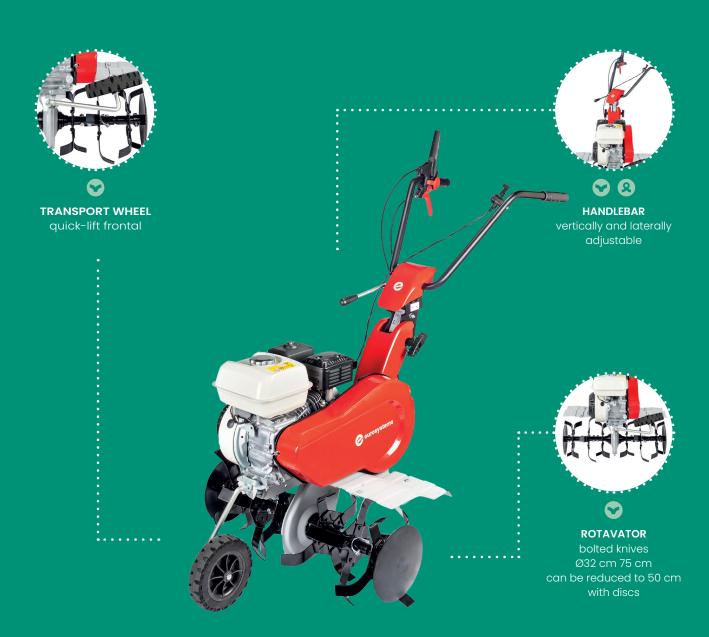

SPUR with 4 adjustments



AERATOR spring-type, 50 cm



RIDGING PLOW with fixed wings



LABOUR CLASSIC KIT wheels 5.00-10" + fixed axles 2 ballast wheels 20 kg each front ballast 15 kg classic plough

*only for labour version



AS STANDARD



ACCESSORY



PATENTED